

Anthrafilt

Product Description

Anthrafilt is a select coal, mined and processed for use in water filtration. It is ideal for single bed, dual bed or multi-media filtration systems.

Although its potential for water treatment has been recognized since ancient times, Anthrafilt coal was not used for this purpose until the beginning of the 20th century. Crushed Anthrafilt makes an excellent medium density filtration media. Anthrafilt is mined from the finest Pennsylvania coal. It is specifically selected for water treatment, and during its production goes through

Advantages

- Higher service flows and longer filter runs than equivalent sand filters
- Close attention to gradation, hardness and purity assures consistent and reliable performance
- Unique density allows Clack Anthrafilt to be combined with other filtration media in multimedia filters
- Lower uniformity coefficient has less oversized and undersized particles resulting in a highly uniform bed

Physical Properties

· Color: Black

Bulk Density: 50 lbs./cu. ft.

Hardness: 3.0-3.8 (Mohs scale)

Effective Size:

#1 Anthrafilt: 0.6-0.8 mm #1½ Anthrafilt: 0.85-0.95 mm #2 Anthrafilt: 1.7-2.0 mm

• Uniformity Coefficient:

#1 Anthrafilt: <1.7 #1½ Anthrafilt: <1.7 #2 Anthrafilt: <1.6

Mesh Size:


#1 Anthrafilt: 14x30 #1½ Anthrafilt: 10x20 #2 Anthrafilt: 4x12 several sizing inspections. Representative samples are randomly chosen for a complete laboratory quality control analysis for effective size, uniformity coefficient, specific gravity, acid solubility and hardness.


Because of its angular shape, some of the sediment penetrates deeper into the bed. When compared to equivalent filter sands, this means longer filter runs and less head loss. Backwash rates are also reduced. Because of its unique density, Anthrafilt can be used in multi-media filters. At 50 lbs/ft³, it will hydraulically classify and remain above heavier media such as Filter Sand or Manganese Greensand, providing a prefiltration layer.

- Acid Solubility: <1%
- Caustic Solubility: <1%
- Apparent Specific Gravity: 1.6 gm/cc
- Meets AWWA Standard B100-01

Conditions For Operation

- Bed depth: 24-36 in., 10-18 in multi-bed filters
- Freeboard: 50% of bed depth (min.)
- Service flow rate: 5 gpm/sq. ft. or higher depending upon local conditions
- Backwash flow rate:
 #1 Anthrafilt: 12-18 gpm/sq. ft.
 #1½ Anthrafilt: 18-25 gpm/sq. ft.
 #2 Anthrafilt: use air scour
- Backwash bed expansion: 20-40% of bed depth

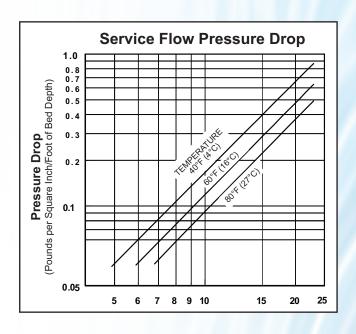

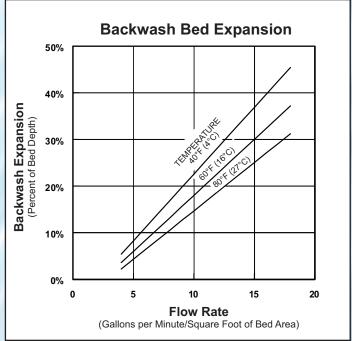



ORDER INFORMATION

Part No.	Description	Cu. Ft./Bag	Wt./Cu. Ft.*	Bags/Pallet	Weight/Pallet	Pallet Dimensions
A8029	Anthrafilt #1 (0.6-0.8 mm)	1	50 lbs.	50	2550 lbs.	40" x 48" x 56"
A8030	Anthrafilt #1½ (0.85-0.95 mm)	1	50 lbs.	50	2550 lbs.	40" x 48" x 56"
A8031	Anthrafilt #2 (1.7-2.0 mm)	1	50 lbs.	50	2550 lbs.	40" x 48" x 56"

^{*}Weight per cubic foot is approximate.

The information and recommendations in this publication are based on data we believe to be reliable. They are offered in good faith, but do not imply any warranty or performance guarantee, as conditions and methods of use of our products are beyond our control. As such, we make no express or implied warranties of any kind with respect to this product, including but not limited to any implied warranty of merchantability or fitness for a particular purpose. We recommend that the user determine whether the products and the information given are appropriate, and the suitability and the performance of our products are appropriate, by testing with its own equipment. Specifications are subject to change without notice.

The filter medias listed in this brochure do not remove or kill bactteria. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

We will not be liable under any circumstance for consequential or incidental damages, including but not limited to, lost profits resulting from the use of our products.



Toll Free: 1-877-288-9888 www.canaturewg.com

Regina, SK • Cambridge, ON • Carmel, IN • Fridley, MN
Pottstown, PA • Phoenix, AZ

Your Local Water Treatment Professional